



Size Ref. AS 568	Tube Size O.D.	Inch Standard		Vol. Cu. In.	Metric Standard		Vol. Cu. In.
		I.D.	W		I.D.	W	
-901	3/32	.185 +/- .005	.056 +/- .003	0.0019	4.70 +/- 0.13	1.42 +/- 0.08	0.031
-902	1/8	.239 +/- .005	.064 +/- .003	0.0031	6.07 +/- 0.13	1.63 +/- 0.08	0.051
-903	3/16	.301 +/- .005	.064 +/- .003	0.0037	7.65 +/- 0.13	1.63 +/- 0.08	0.061
-904	1/4	.351 +/- .005	.072 +/- .003	0.0054	8.92 +/- 0.13	1.83 +/- 0.08	0.088
-905	5/16	.414 +/- .005	.072 +/- .003	0.0062	10.52 +/- 0.13	1.83 +/- 0.08	0.102
-906	3/8	.468 +/- .005	.078 +/- .003	0.0082	11.89 +/- 0.13	1.98 +/- 0.08	0.134
-907	7/16	.530 +/- .005	.082 +/- .003	0.0102	13.46 +/- 0.18	2.08 +/- 0.08	0.167
-908	1/2	.644 +/- .009	.087 +/- .003	0.0137	16.36 +/- 0.23	2.21 +/- 0.08	0.225
-909	9/16	.706 +/- .009	.097 +/- .003	0.0186	17.94 +/- 0.23	2.46 +/- 0.08	0.305
-910	5/8	.755 +/- .009	.097 +/- .003	0.0198	19.18 +/- 0.23	2.46 +/- 0.08	0.324
-911	11/16	.863 +/- .009	.116 +/- .004	0.0325	21.92 +/- .023	2.95 +/- 0.10	0.533
-912	3/4	.924 +/- .009	.116 +/- .004	0.0345	23.47 +/- 0.23	2.95 +/- 0.10	0.565
-913	13/16	.986 +/- .010	.116 +/- .004	0.0366	25.04 +/- 0.25	2.95 +/- 0.10	0.600
-914	7/8	1.047 +/- .010	.116 +/- .004	0.0386	26.60 +/- 0.25	2.95 +/- 0.10	0.633
-916	1	1.171 +/- .010	.116 +/- .004	0.0427	29.75 +/- 0.25	2.95 +/- 0.10	0.700
-918	1-1/8	1.355 +/- .012	.116 +/- .004	0.0488	34.42 +/- 0.30	2.95 +/- 0.10	0.800
-920	1-1/4	1.475 +/- .014	.118 +/- .004	0.0547	37.46 +/- 0.35	3.00 +/- 0.10	0.896
-924	1-1/2	1.720 +/- .014	.118 +/- .004	0.0631	43.68 +/- 0.35	3.00 +/- 0.10	1.034
-928	1-3/4	2.090 +/- .018	.118 +/- .004	0.0759	53.09 +/- 0.45	3.00 +/- 0.10	1.244
-932	2	2.337 +/- .018	.118 +/- .004	0.0843	59.36 +/- 0.45	3.00 +/- 0.10	1.381

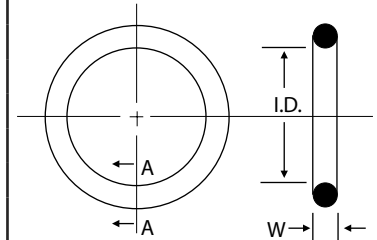

ENLARGED SECTION A-A

### Design Notes:

Durometer: O-Ring sizes for Boss Tube Fittings are available in both 70 & 90 Durometer.

Application: providing a seal for straight-thread tube fittings on a boss.

Numbering System: The two digits after the -9 represent the Tube Size O.D. in 16ths of an inch. For example -905 is sized for a Tube O.D. of 5/16". The one exception is for -901 where the Tube Size O.D. is 3/32".